




0051
0051-CPR-1498
0051-CPR-1499


PREVIDIA | COMPACT

REMOTE REPEATER PANEL

Remote keypad with a neat, aesthetically pleasing design. It connects to a HORNET+ network (double RS485 connection), operates as a remote keypad for both Previdia Compact and Previdia Max control panels. It provides detailed information about the entire network, customizable display.

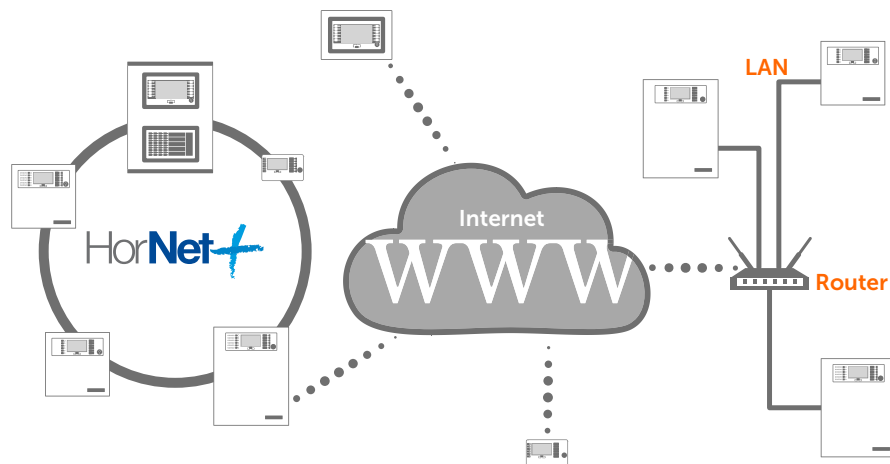

INSTALLATION

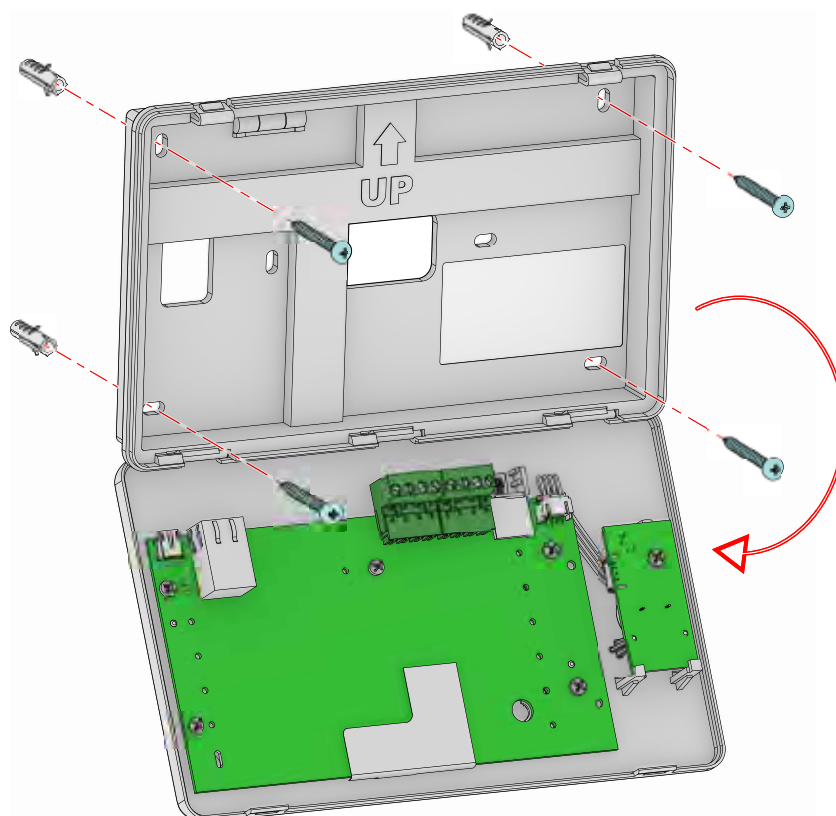

PREVIDIA-C-REP



EN 54-2
EN 54-4
EN 54-13
EN 54-21
EN 12094-1


0051
0051-CPR-1498
0051-CPR-1499

PREVIDIA|COMPACT

TECHNICAL SPECIFICATIONS

- Power supply voltage: 19 – 30 Vdc
- Stand-by current draw: 110mA
- Maximum current draw: 130mA
- Operating temperature: -5° .. +40° C
- Dimensions: 210 x 132 x 32mm
- Weight: 330g

CONFIGURATION DIAGRAM

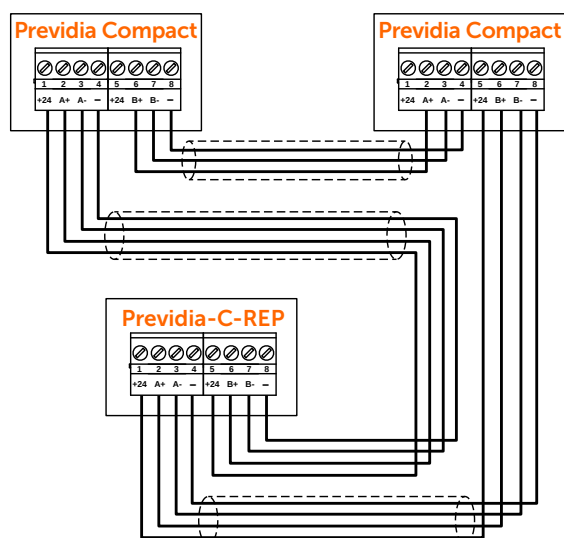

ORDER CODES

PREVIDIA-C-REPW
PREVIDIA-C-REPEW
PREVIDIA-C-REPR
PREVIDIA-C-REPER
PREVIDIA-Cxyz

base version. Plastic color white.
version with extinction display. Plastic color white.
base version. Plastic color red.
version with extinction display. Plastic color red.
analog addressable networkable fire detection control panel



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature