




DS-K7P03A Touchless Push Button



Specification




- Size: 86Lx86Wx28(mm)
- Input : DC12V
- Contact rating: 1A@30VDC
- Output contact: NO\NC\COM
- Mechanical life: 1,000,000 tests
- Suitable for door: Hollow Door
- Detection range: 5-20cm(Adjustable)
- Time delay: 1~25s(Adjustable)
- Current: Standby 40mA, Action 70mA
- Operating temp: -20°C ~+55°C (-4-131°F)
- Suitable humidity: 0-95% (relative humidity)
- LED Indicator:
 - Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Material: Stainless
- Weight: 0.14kg

Installation & Size

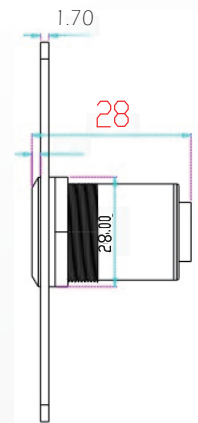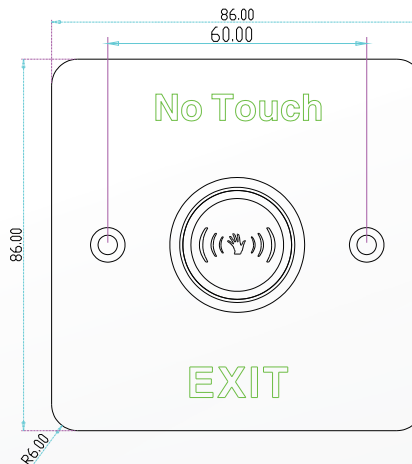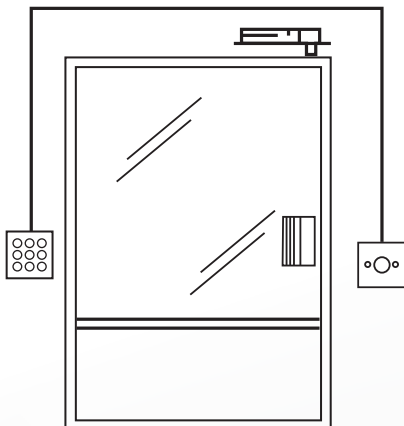

Installation

Time Delay:0.3S-30S

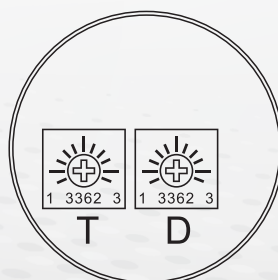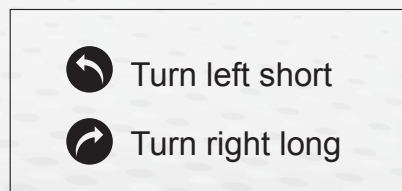

Detection range:5-20cm(Adjustable)

